



Belize Department of Civil Aviation

ADVISORY CIRCULAR

Subject: Obstacle Limitation Surfaces, Charts and Shielding Principles

Date: 15-11-2022
Initiated by: HWP

AC No. BDCA AGA-07-2022
Revision: 001

SUBJECT: The scope of this AC is to define the standards and criteria for control airspace around an aerodrome.

1. THE PURPOSE OF THIS ADVISORY CIRCULAR.

The purpose of this circular is to give guidelines on the obstacle assessment in the Obstacle Limitation Surfaces and to establish clear criteria on the application of the objects shielding principles in Belize.

2. WHAT THIS AC CANCELS

This AC cancels AC BDCA AGA-07-2018 Revision 0

3. WHO THIS AC AFFECTS.

Aerodrome Operators, Aerodrome Inspectors, developers and public in general.

4. WHERE TO GET A COPY OF THIS AC.

You can get a Copy of this AC in the Technical Library of the Belize Department of Civil Aviation (BDCA) and in the BDCA website.

Capt. Nigel Carter
Director, Belize Department of Civil Aviation

Table of Contents

Section 1- Obstacle Restriction and Limitation	3
1. Introduction.....	3
2. Obstacle Restriction	3
3. Obstacle Limitation	3
4. Procedures for Aerodrome Operators to Deal with Obstacles	7
5. Objects Outside the OLS.....	7
6. Objects That Could Become Obstacles.....	7
7. Monitoring of Obstacles Associated with Instrument Runways	8
8. Additional Obstacle Assessment for an Existing Non-instrument Runway to be Upgraded to a Non-precision Instrument Runway.....	9
9. Obstacle Protection for Curved Take-Off	9
Section 2- Aerodrome Obstacle Charts	10
1. Type A Charts.....	10
2. Type B Charts.....	11
3. Type C Charts	11
fSection 3- Obstacle Limitation Surfaces	12
1. General.....	12
2. Description of OLS	12
Section 4- Principles of Shielding	22
1. General.....	22
2. Shielding Principles	23
Appendix 1- Figures.....	26

Section 1- Obstacle Restriction and Limitation

General

1. Introduction

- 1.1. The scope of this Section is to define the standards that control airspace around an aerodrome.
- 1.2. An obstacle is defined as:
 - a) any object that stands on, or stands above, the specified surface of an obstacle restriction area which comprises the runway strips, runway end safety areas, clearways and taxiway strips; and
 - b) any object that penetrates the obstacle limitation surfaces (OLS), a series of surfaces that set the height limits of objects, around an aerodrome.
- 1.3. Obstacle data requirements for the design of instrument procedures need to be determined in liaison with flight procedure designers.
- 1.4. Non-compliance with standards may result in BDCA issuing hazard notification notices as prescribed in BCAR 139.
- 1.5. All aerodromes in Belize have to comply with the Airports (Protection of Airspace) Regulations. There is provision under these regulations for the airspace prescribed for each aerodrome to comply with OLS standards and meet PANS-OPS requirements.

2. Obstacle Restriction

- 2.1. Objects, except for approved visual and navigational aids, must not be located within the obstacle restriction area of the aerodrome without the specific approval of BDCA.
- 2.2. Equipment and installations required for air navigation purposes are to be of minimum practicable mass and height, frangible designed and mounted, and sited in such a manner as to reduce the hazard to aircraft to a minimum.
- 2.3. Obstacles on the obstacle restriction area must be taken into account when determining the obstacle clear approach or take-off surfaces.

3. Obstacle Limitation

- 3.1. An aerodrome operator must establish the OLS applicable to the aerodrome.

<p>Note: A description and illustration of the obstacle limitation surfaces is provided in Section 3.</p>
--

3.2. The following OLS shall be established for a non-instrument runway and a non-precision instrument runway:

- a) conical surface;
- b) inner horizontal surface;
- c) approach surface;
- d) transitional surface; and
- e) take-off climb surface.

3.3. The following OLS must be established for a precision approach runway:

- a) outer horizontal surface;
- b) conical surface;
- c) inner horizontal surface;
- d) approach surface;
- e) inner approach surface;
- f) transitional surface;
- g) inner transitional surface;
- h) baulked landing surface; and
- i) take-off climb surface.

3.4. The physical dimensions of the OLS surfaces, for approach runways, must be determined using Table 1.1

Table 1-1: Approach Runways

OLS & Dimensions (in metres and percentages)	Runway Classification									
	Non-instrument				Instrument					
					Non-precision			Precision		
	Code No				Code No			CAT I Code No		CAT II & III Code No
1*	2	3	4	1, 2	3	4	1, 2	3, 4	3, 4	
OUTER HORIZONTAL										
Height (m)									150	150
Radius (m)									15000	15000
CONICAL										
Slope	5%	5%	5%	5%	5%	5%	5%	5%	5%	5%
Height (m)	35	55	75	100	60	75	100	60	100	100
INNER HORIZONTAL										
Height (m)	45	45	45	45	45	45	45	45	45	45
Radius (m)	2000	2500	4000	4000	3500	4000	4000	3500	4000	4000
APPROACH										
Length of inner edge (m)	60	80	150 ^a	150	90	150	300 ^b	150	300	300
Distance from threshold (m)	30	60	60	60	60	60	60	60	60	60
Divergence each side	10%	10%	10%	10%	15%	15%	15%	15%	15%	15%
First section length (m)	1600	2500	3000	3000	2500	3000	3000	3000	3000	3000
Slope	5%	4%	3.33%	2.5%	3.33%	3.33%	2%	2.5%	2%	2%
Second section length (m)	-	-	-	-	-	3600 ^c	3600	12000	3600	3600
Slope	-	-	-	-	-	2.5% ^c	2.5%	3%	2.5%	2.5%
Horizontal section length (m)	-	-	-	-	-	8400 ^c	8400	-	8400	8400
Total length (m)	1600	2500	3000	3000	2500	15000 ^d	15000	15000	15000	15000
INNER APPROACH										
Width (m)								90	120	120
Distance from threshold (m)								60	60	60
Length (m)								900	900	900
Slope								2.5%	2%	2%
TRANSITIONAL										
Slope	20%	20%	14.3%	14.3%	20%	14.3%	14.3%	14.3%	14.3%	14.3%
INNER TRANSITIONAL										
Slope								40%	33.3%	33.3%
BAULKED LANDING										
Length of inner edge (m)								90	120	120
Distance from threshold (m)								^e	1800 ^f	1800
Divergence each side								10%	10%	10%
Slope								4%	3.3%	3.3%

All distances are measured horizontally unless otherwise specified.

* Runways used for RPT operations at night by aircraft with maximum take-off mass not exceeding 5,700 kg are required to meet code 2 standards.

^a 90 m where width of runway is 30 m.

^b 150 m if only used by aeroplanes requiring 30 m wide runway.

- ^c No actual ground survey required unless specifically required by procedure designer. Procedure designer will use topographical maps and tall structure databank to determine minimum altitudes.
- ^d Approach area up to this distance needs to be monitored for new obstacles. Refer to procedure designer's advice on significant high ground or tall structure that needs monitoring.
- ^e Distance to end of runway strip.
- ^f Or to the end of the runway strip, whichever is less.

3.5. The physical dimensions of the OLS surfaces, for take-off runways, must be determined using Table 1-2.

Table 1-2: Take-off runways

Take-off climb surface – Dimensions (in metres and percentages)	Take-off Runways Code number		
	1*	2 ^a	3 or 4
Length of inner edge	60	80	180 ^b
Minimum distance of inner edge from runway end ^c	30	60	60
Rate of divergence (each side)	10%	10%	12.5%
Final width	380	580	1800 ^d
Overall length	1600	2500	15000
Slope	5%	4%	2% ^e

All dimensions are measured horizontally unless otherwise specified.

* Runways used for RPT operations at night by aircraft with maximum take-off mass not exceeding 5,700 kg are required to meet code 2 standards.

^a For aircraft above 5,700 kg the survey area does not cover full extent of obstacle clearance required as specified in CAO 20.7.1B.

^b The length of the inner edge may be reduced to 90 m if the runway is intended to be used by aeroplanes having an mass less than 22,700 kg and operating in VMC by day. In this case the final width may be 600 m, unless the flight path may involve a change of heading in excess of 15°.

^c The take-off climb starts from the end of clearway if a clearway is provided.

^d The final width may be reduced to 1200 m if the runway is used only by aircraft with take-off procedure which does not include changes of heading greater than 15° for operations conducted in IMC or at night.

^e The operational characteristics of aircraft for which the runway is intended should be examined to see if it is desirable to reduce the slope to cater for critical operating conditions as specified in CAO 20.7.1B. If the specified slope is reduced, corresponding adjustment in length for take-off climb is to be made so as to provide protection to a height of 300 m. If no object reaches the 2% take-off climb surface, new objects should be limited to preserve the existing obstacle free surface or a surface down to a slope of 1.6%.

3.6. Where two OLS surfaces overlap, the lower surface must be used as the controlling OLS.

4. Procedures for Aerodrome Operators to Deal with Obstacles

- 4.1 The aerodrome operator must monitor the OLS applicable to the aerodrome and report to BDCA any infringement or potential infringement of the OLS.

Note: Aerodrome operators need to liaise with appropriate planning authorities and companies that erect tall structures, to determine potential infringements. Every effort should be made to implement the OLS standards and limit the introduction of new obstacles.

- 4.2 When a new obstacle is detected, the aerodrome operator must ensure that the information is passed on to pilots, through NOTAM, in accordance with the standards for aerodrome reporting procedures.
- 4.3 Information on any new obstacle must include:
- (a) the nature of the obstacle — for instance structure or machinery;
 - (b) distance and bearing of the obstacle from the start of the take-off end of the runway, if the obstacle is within the take-off area, or the ARP;
 - (c) height of the obstacle in relation to the aerodrome elevation; and
 - (d) if it is a temporary obstacle — the time it is an obstacle.

5. Objects Outside the OLS

- 5.1 Any object which extends to a height of 110 m or more above local ground level must be notified to BDCA.

Note: For instrument runways, obstacle monitoring includes the PANS- OPS surface which extends beyond the OLS of the aerodrome. See paragraph Section 1, 1.1.

- 5.2 Any object that extends to a height of 150 m or more above local ground level must be regarded as an obstacle unless it is assessed by BDCA to be otherwise.

6. Objects That Could Become Obstacles

- 6.1 If a proposed object or structure is determined to be an obstacle, details of the proposal must be referred to BDCA the Authority to determine whether it will be a hazard to aircraft operations.
- 6.2 Shielded Obstacle. A new obstacle that is shielded by an existing obstacle may be assessed as not imposing additional restrictions to aircraft operations.

Note: Information on the principle of shielding is provided in [Section 4](#).

6.3 Marking and lighting of obstacles

- (a) BDCA may direct that obstacles be marked and or lit and may impose operational restrictions on the aerodrome as a result of an obstacle.
- (b) If directed by BDCA, lighting and/or marking of obstacles, including terrain, must be carried out in accordance with the standards set out in BCAR 14

6.4 Temporary and transient obstacles. Temporary obstacles and transient (mobile) obstacles, such as road vehicles, rail carriages or ships, in close proximity to the aerodrome and which penetrate the OLS for a short duration, must be referred to BDCA to determine whether they will be a hazard to aircraft operations.

6.5 Fences or levee banks. A fence or levee bank that penetrates the OLS must be treated as an obstacle.

6.6 Hazardous objects below the OLS. Where BDCA has identified an object, which does not penetrate the OLS to be a hazard to aircraft operations, BDCA may require the object to be either:

- (a) removed, if appropriate; or
- (b) marked and/or lit.

Note: For example, inconspicuous overhead wires or isolated objects in the vicinity of the aerodrome.

7. Monitoring of Obstacles Associated with Instrument Runways

7.1 For a precision approach runway, the aerodrome operator must monitor any object that may penetrate the applicable OLS.

7.2 For a non-precision approach runway, besides monitoring the applicable OLS, obstacle monitoring includes areas outside the OLS, also known as PANS-OPS surfaces, used in the design of the NPA procedures. To make it easier for aerodrome operators to carry out this task, procedure designers will be asked to provide aerodrome operators with a drawing or drawings of the area around the aerodrome, showing the designed approach paths, the circling areas and locations of critical obstacles taken into account in the design. In the case of a terrain obstacle, such as a hill, allowance provided for vegetation should also be provided, if appropriate.

- 7.3 Aerodrome operators must establish procedures to monitor the OLS and the critical obstacles associated with the NPA procedures and have them included in the Aerodrome Manual. The procedure designer must be advised of any changes of the status of the existing critical obstacles and any proposed development that is likely to be higher than the critical obstacles within the area depicted by the procedure designer.

8. Additional Obstacle Assessment for an Existing Non-instrument Runway to be Upgraded to a Non-precision Instrument Runway

- 8.1 For code 1 and 2 runways, there is a slight increase in the area of coverage for both the inner horizontal and conical obstacle limitation surfaces, as specified in Table 1-1.

Note: The required survey may be held over until the next OLS survey is due.

- 8.2 For code 1, 2 and 3 runways, an additional survey of the approach obstacle limitation surface may be limited to the first section of the approach OLS (i.e. to a distance of 2500m for code 1 and 2 runways and 3000m for code 3 runways). The purpose of this survey is to identify any obstacle that may affect the location of the threshold or needs to be provided with obstacle marking or lighting.
- 8.3 To allow for possibility of missing obstacle information, an NPA procedure will be checked by flight validation. On-going monitoring of obstacles within the second and horizontal sections of the approach area should be included in the drawing(s) provided by the procedure designer.
- 8.4 Any new object which may penetrate the inner horizontal, conical and the first section of the approach surfaces, as specified in Table 1-1, must be identified and, if its presence cannot be avoided, the details of the obstacles must be forwarded to the relevant BDCA office for assessment of marking and lighting requirements. Any object that may penetrate the PANS-OPS surface, as per advice from the procedure designer, must be forwarded to the PANS-OPS design service provider.

9. Protection for Curved Take-Off

- 9.1 At present BDCA does not promulgate a general standard for obstacle limitation surfaces in respect of curved take-off climb surface. Request for approval for curved take-off procedures may originate from aircraft operators or the aerodrome operators, and BDCA will deal with such requests on a case-by-case basis.

Section 2- Aerodrome Obstacle Charts

1. Type A Charts

- 1.1 The Type A chart is an ICAO chart which identifies information on all significant obstacles within the take-off area of an aerodrome up to 10 km from the end of the runway.
- 1.2 A Type A chart must be prepared for each runway that is used in international operations.
- 1.3 The obstacle data to be collected and the manner of presentation of the Type A chart must be in accordance with the standards and procedures set out in ICAO Annex 4.

Note: A Type A chart meeting the accuracy requirements of Annex 4 is adequate.

- 1.4 Where no significant obstacle exists within the take-off flight path area, as specified by Annex 4, a Type A chart is not required but a statement must be included in the Aerodrome Manual.
- 1.5 At aerodromes with no international operations, used by aircraft above 5,700 kg engaged in air transport operations, under CAO 20.7.1B, the decision to prepare Type A charts, or discrete obstacle information instead of a Type A chart, is a matter for the aerodrome operator to be made in conjunction with the relevant airline.
- 1.6 Where a Type A chart has been prepared, or updated, a copy of the chart must be given to BDCA.
- 1.7 Where a Type A chart has been prepared and issued the take-off flight area must be monitored and any changes to the Type A chart information must immediately be communicated to all users of the Type A chart.

Notes: 1: Changes to the Type A chart information but not to OLS take-off climb surface does not require NOTAM action.
2: Where the change to Type A chart information is also the subject of NOTAM action, additional separate advice to Type A chart holders is not necessary.

- 1.8 A distribution list of current Type A chart holders must be maintained.
- 1.9 A Type A chart must be updated when the number of changes to the chart, notified through NOTAM or separate advice, reaches a level, which BDCA considers excessive.

2. Type B Charts

- 2.1 A Type B chart is an ICAO obstacle chart that provides obstacle data around the aerodrome.
- 2.2 A Type B chart, prepared in accordance with the standards and procedures set out in BCAR 4, may be provided.

Note: This may be required by operators of aircraft above 5,700 kg to identify obstacles around an aerodrome.

- 2.3 The decision to prepare a Type B chart must be made in consultation with BDCA.
- 2.4 Where required, the obstacle data to be collected and the manner of presentation of the Type B chart must be in accordance with the standards and procedures set out in ICAO Annex 4.

3. Type C Charts

- 3.1 A Type C chart is an ICAO obstacle chart that provides data on all significant obstacles up to 45 km from the aerodrome. International aircraft operators may require this chart.
- 3.2 For aerodromes regularly used by aircraft engaged in international aviation, the decision to prepare a Type C chart must be made in consultation with the international aircraft operators and BDCA.
- 3.3 Where prepared, the Type C charts may be produced using one of the following methods:
 - (a) a complete Type C chart in accordance with the standards and procedures set out in ICAO Annex 4; or
 - (b) based on an actual survey meeting the order of accuracy requirements of Annex 4, produce a list containing all significant obstacles above a nominal obstacle height; or
 - (c) based on topographical maps, where available, meeting the order of accuracy requirements of Annex 14, produce a list containing all significant obstacles above a nominal obstacle height.

Section 3- Obstacle Limitation Surfaces

1. General

- 1.1 The Obstacle Limitation Surfaces (OLS) are conceptual (imaginary) surfaces associated with a runway, which identify the lower limits of the aerodrome airspace above which objects become obstacles to aircraft operations and must be reported to BDCA.

Note: The term OLS is used to refer to each of the imaginary surfaces which together define the lower boundary of aerodrome airspace, as well as to refer to the complex imaginary surface formed by combining all the individual surfaces.

- 1.2 The OLS comprises the following:
- (a) outer horizontal surface;
 - (b) conical surface;
 - (c) inner horizontal surface;
 - (d) approach surface;
 - (e) inner approach surface;
- 1.3 transitional surface;
- (f) inner transitional surface;
 - (g) baulked landing surface; and
 - (h) take-off climb surface.

2. Description of OLS

- 2.1 Reference Elevation Datum. A reference elevation datum is to be established as a benchmark for the horizontal and conical surfaces. The reference elevation datum is to be:
- (a) the same as the elevation of the ARP (rounded off to the next half- metre below), provided this elevation is within three metres of the average elevations of all existing and proposed runway ends; otherwise
 - (b) the average elevation (rounded off to the next half-metre below) of existing and proposed runway ends.

Note: The reference elevation datum is not to be confused with the aerodrome elevation published in AIP - Enroute Supplement. Aerodrome elevation is, by definition, the highest point on the landing area.

2.2 Outer Horizontal Surface. The outer horizontal surface is a plane located 150 m above the reference elevation datum and extending from the upper edge of the extended conical surface for a distance of 15,000 m (radius) from the aerodrome reference point (ARP).

2.3 **Conical Surface.**

- (a) The conical surface comprises both straight and curved elements, which slope upwards and outwards from the edge of the inner horizontal surface to a specified height above the inner horizontal surface.
- (b) The slope of the conical surface is to be measured in a vertical plane perpendicular to the periphery of the inner horizontal surface.

2.4 **Inner Horizontal Surface.** The inner horizontal surface is a horizontal plane at a specified height above the reference elevation datum extending to an outer boundary comprising:

- (a) in the case of an aerodrome with a single runway, semi-circular curves of a specified radius centred on the middle of each of the runway strip ends and joined tangentially by straight lines on each side of the runway, parallel to the runway centreline;
- (b) in the case of an aerodrome with multiple runways, curves of a specified radius centred on the middle of each of the runway strip ends and the curves are joined by a tangential line as two curves intersect.

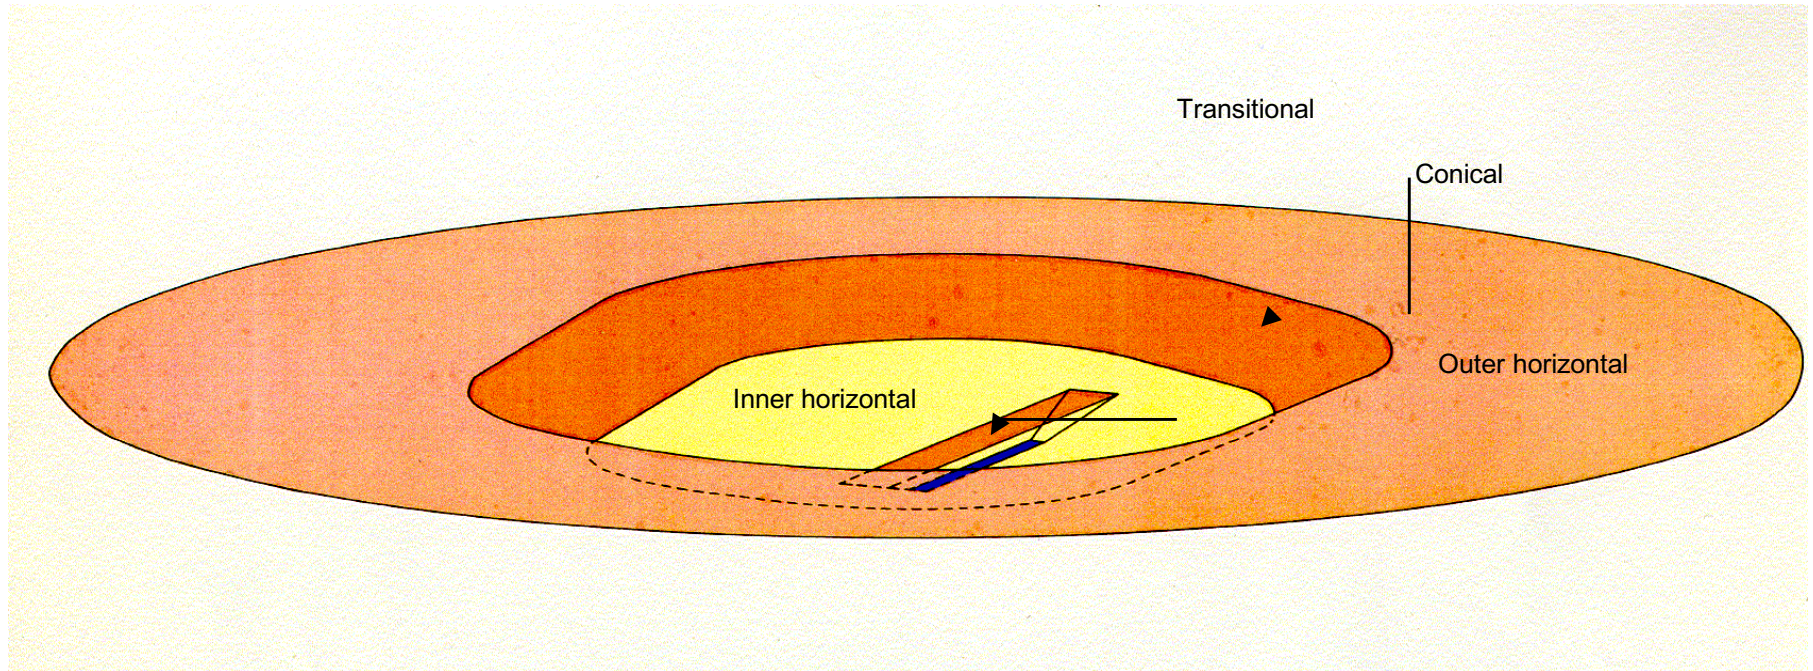


Figure 3-1: Relationship of outer horizontal, conical, inner horizontal and transitional surfaces

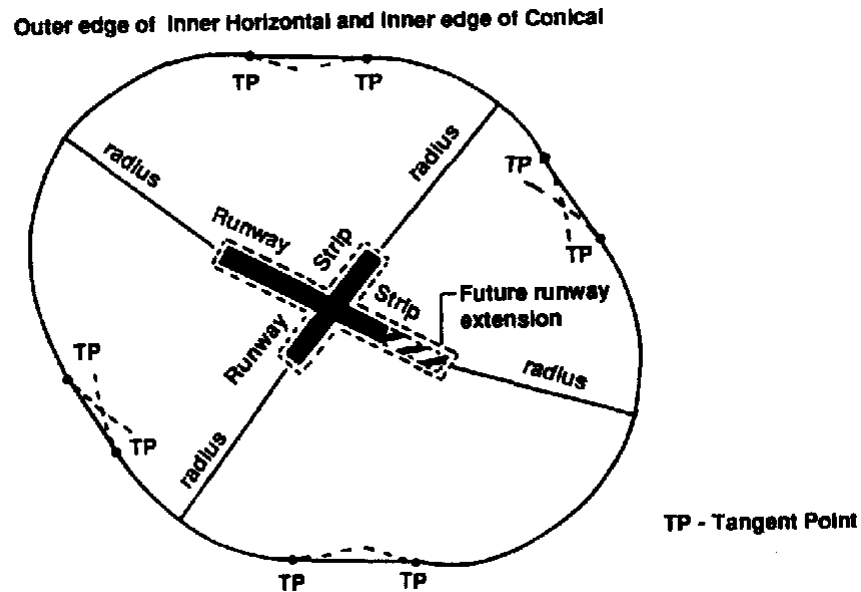


Figure 3-2: Boundary of inner horizontal surface

2.5 Approach Surface

- (a) The approach surface is an inclined plane or combination of planes which originate from the inner edge associated with each runway threshold, with two sides originating at the ends of the inner edge.
- (b) The inner edge associated with each runway threshold has a specified length, and is located horizontally and perpendicularly to the runway centreline, at a specified distance before the threshold.
- (c) The two sides diverge uniformly at a specified rate from the extended centreline of the runway.
- (d) The approach surface may be divided into three sections and ends at an outer edge that is located at a specified overall distance from the inner edge and parallel to the inner edge.
- (e) The elevation of the midpoint of the threshold is to be the elevation of the inner edge.
- (f) The slope of each section of the approach surface is at a specified rate and is to be measured in the vertical plane containing the centreline of the runway.
- (g) The above surfaces are to be varied when lateral offset, offset or curved approaches are utilised, specifically, two sides originating at the ends of the inner edge and diverging uniformly at a specified rate from the extended centreline of the lateral offset, offset or curved ground track.

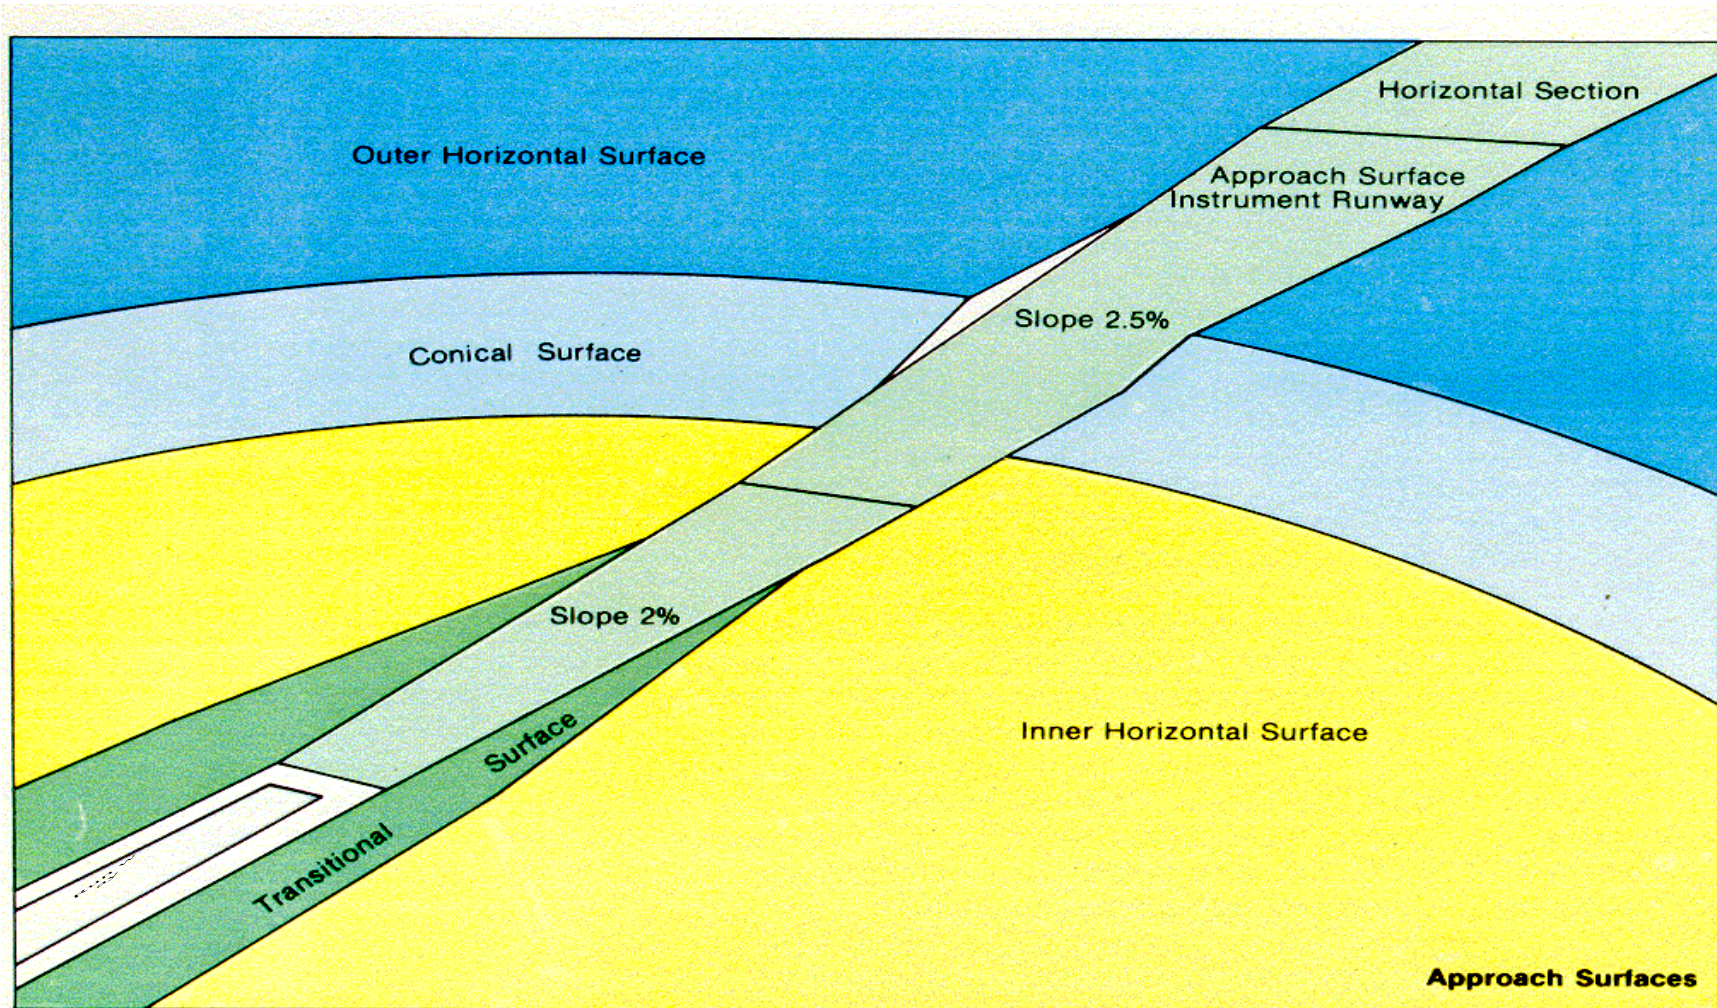


Figure.3-3: Approach surface for an instrument approach runway

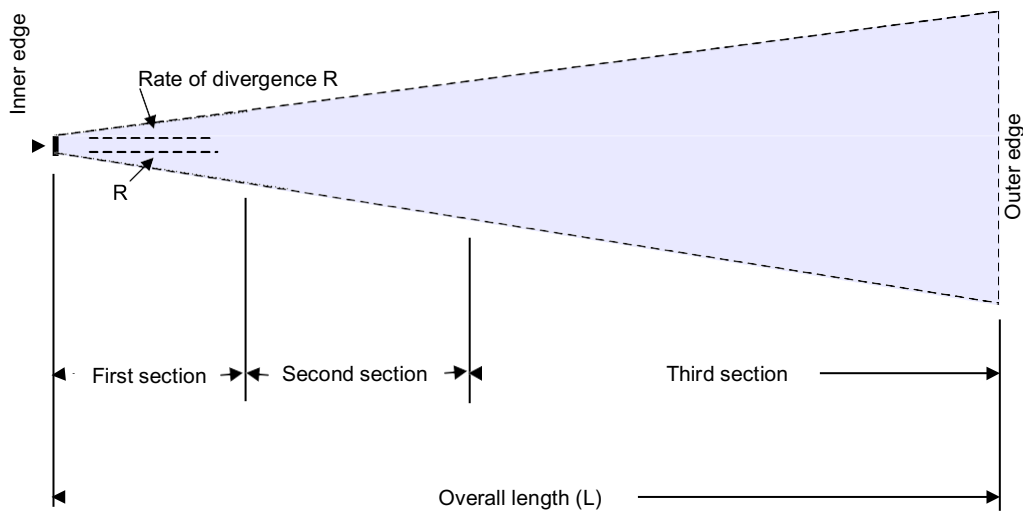


Figure 3-4: Plan view of approach surface

2.6 Transitional Surface

- (a) The transitional surface comprises inclined planes that originate at the lower edge from the side of the runway strip (the overall strip), and the side of the approach surface that is below the inner horizontal surface, and finishes where the upper edge is located in the plane of the inner horizontal surface.
- (b) The transitional surface slopes upwards and outward at a specified rate and is to be measured in a vertical plane at right angles to the centreline of the runway.
- (c) The elevation of a point on the lower edge of the transition surface is to be:
 - (i) along the side of the approach surface, equal to the elevation of the approach surface at that point; and
 - (ii) along the side of the runway strip, equal to the nearest point on the centreline of the runway or stopway.

Note: For the purpose of drawing the transitional surface, the lower edge of the transitional surface along the runway strip may be drawn as a straight line joining the corresponding ends of the approach surfaces at each end of the runway strip. However, when assessing whether an object may penetrate the transitional surface, the standard of the transitional surface applies.

2.7 **Obstacle-Free Zone.** The inner approach, inner transitional and baulked landing surfaces together define a volume of airspace in the immediate vicinity of a precision approach runway, which is known as the obstacle-free zone. This zone must be kept free from fixed objects, other than lightweight frangible mounted aids to air navigation which must be near the runway to perform their function, and from transient objects such as aircraft and vehicles when the runway is being used for precision approaches.

2.8 **Inner Approach Surface**

- (a) The inner approach surface is a rectangular portion of the approach surface immediately preceding the threshold.
- (b) The inner approach surface originates from an inner edge of a specified length, at the same location as the inner edge for the approach surface and extends on two sides parallel to the vertical plane containing the runway centreline, to an outer edge which is located at a specified distance to the inner edge and parallel to the inner edge.

2.9 **Inner Transitional Surface**

- (a) The inner transitional surface is similar to the transitional surface but closer to the runway. The lower edge of this surface originates from the end of the inner approach surface, extending down the side of the inner approach surface to the inner edge of that surface, thence along the runway strip to the inner edge of the baulked landing surface and from there up the side of the baulked landing surface to the point where the side intersects the inner horizontal surface.
- (b) The elevation of a point on the lower edge is to be:
 - (i) along the side of the inner approach and baulked landing surface, equal to the elevation of the particular surface at that point;
 - (ii) along the runway strip, equal to the elevation of the nearest point on the centreline of the runway or stopway.
- (c) The inner transitional surface slopes upwards and outwards at a specified rate and is to be measured in a vertical plane at right angles to the centreline of the runway.
- (d) The upper edge of the inner transitional surface is located in the plane of the inner horizontal surface.
- (e) The inner transitional surface should be used as the controlling surface for navigational aids, aircraft and vehicle holding positions which have to be located near the runway. The transitional surface should be used for building height control.

2.10 **Baulked Landing Surface**

- (a) The baulked landing surface is an inclined plane originating at a specified distance after the threshold and extending between the inner transitional surfaces.

- (b) The baulked landing surface originates from an inner edge of a specified length, located horizontally and perpendicularly to the centreline of the runway, with two sides from the ends of the inner edge diverging uniformly at a specified rate from the vertical plane containing the centreline of the runway, ending at an outer edge located in the plane of the inner horizontal surface.
- (c) The elevation of the inner edge is to be equal to the elevation of the runway centreline at the location of the inner edge.
- (d) The specified slope of the baulked landing surface is to be measured in the vertical plane containing the centreline of the runway.

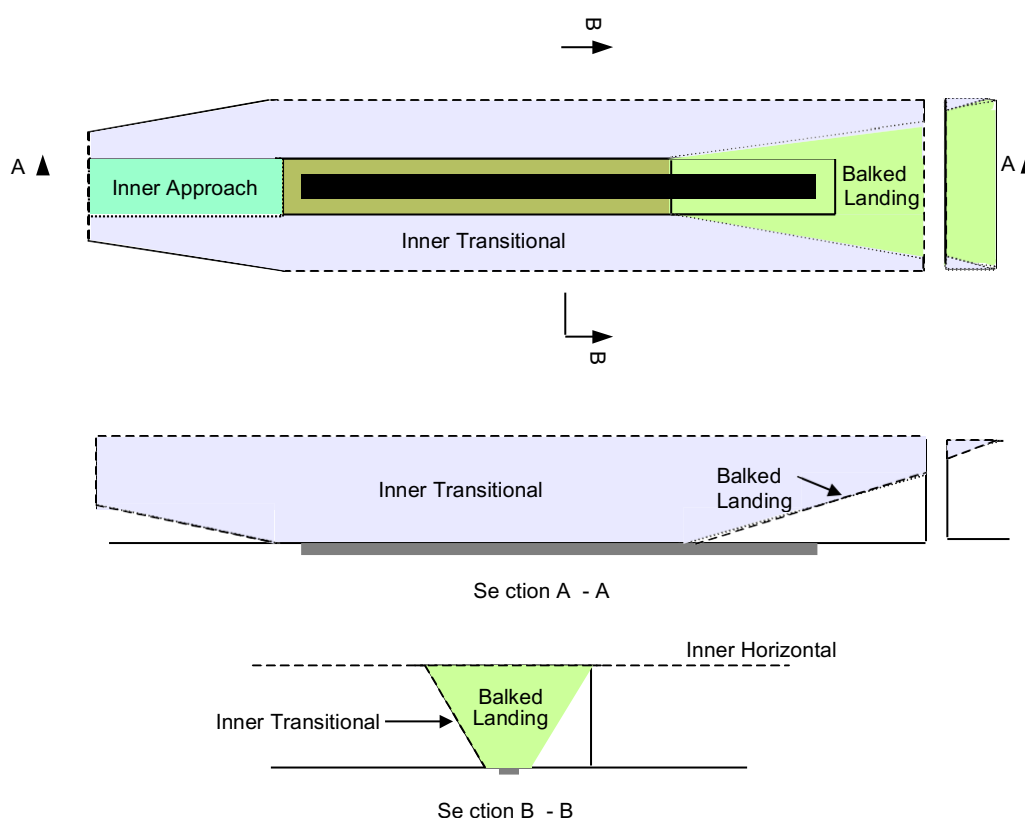


Figure 3-5: Inner approach, inner transitional and baulked landing obstacle limitation surfaces

2.11 Take-Off Climb Surface

- (a) The take-off climb surface is an inclined plane (or other shape in the case of curved take-off) located beyond the end of the runway or clearway.
- (b) The origin of the take-off climb surface is the inner edge of a specified length, located at a specified distance from the end of the runway or the clearway. The plane from the inner edge slopes upward at a specified rate, with the two sides of the plane originating from the ends of the inner edge concurrently diverging uniformly outwards at a specified rate, to a specified final width, and continuing thereafter at that width for the

remainder of the specified overall length of the take-off climb surface until it reaches the outer edge which is horizontal and perpendicular to the take-off track.

- (c) The elevation of the inner edge is to be equal to the highest point on the extended runway centreline between the end of the runway and the inner edge, except that when a clearway is provided the elevation is to be equal to the highest point on the ground on the centreline on the clearway.
- (d) The slope of the take-off climb surface is to be measured in the vertical plane containing the centreline of the runway.

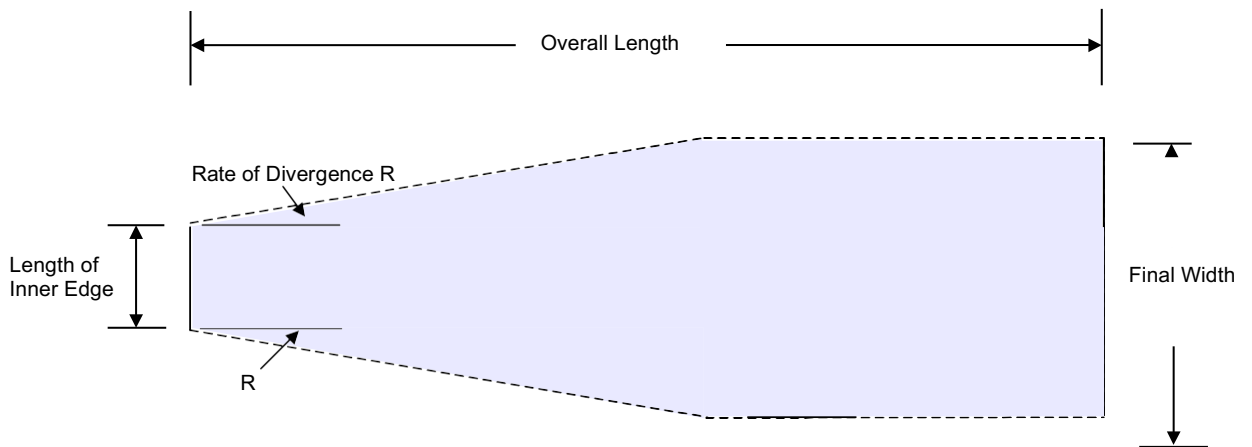


Figure 3-6: Plan view of take-off climb surface

Section 4- Principles of Shielding

1. General

The purpose of this section is to provide detailed information on the Shielding principle to allow a more logical criterion to be applied to the approval of new constructions and to prescribe marking and illumination of obstacles.

- 1.1 Based on the Subpart D - OBSTACLE RESTRICTION AND REMOVAL of the BCAR 14 Aerodromes, a clear operative protection is determined to the Aerodromes, by means of the Obstacle Limiting Surfaces, in which it is established that the presence of new objects or enlarge existing ones will not be allowed above a certain surface, except when, after a technical assessment of the BDCA, the new object or the enlarged object is shielded by an existing permanent object (fixed obstacle).
- 1.2 A new obstacle located in the vicinity of an existing obstacle and assessed as not being a hazard to aircraft is deemed to be shielded.
- 1.3 Shielding principles are employed when some object, an existing building or natural terrain (hills or mountains), already penetrates above one of the obstacle limitation surfaces described in BCAR 14 Subpart D, and they are shielding another object. If it is considered that the nature of an object is such that its presence may be described as permanent, then additional objects within a specified area around it may be permitted to penetrate the surface without being considered as obstacles. The original obstacle is considered as dominating or shielding the surrounding area.
- 1.4 Unless specifically directed by the Authority, a shielded obstacle does not require removal, lowering, marking or lighting and should not impose any additional restrictions to aircraft operations.
- 1.5 The Authority shall assess and determine whether an obstacle is shielded. The aerodrome operator is to notify the Authority of the presence of all obstacles.
- 1.6 Only existing permanent obstacles may be considered in assessing shielding of new obstacles.
- 1.7 The permanency of the immovable obstacle which is to be considered as shielding an area should be given very careful review. An object should be classed as immovable only if, when taking the longest view possible, there is no prospect of removal being practicable, possible or justifiable, regardless of how the pattern, type or density of air operations might change.
- 1.8 Doc 9137, Part 6 establishes that It is generally agreed that the formula for shielding should be based on a horizontal plane projected from the top of each obstacle away from the runway and a plane with a negative slope of 10% towards the runway. Any object which is below either of the two planes would be considered shielded. The permission to allow objects to penetrate an obstacle limitation surface under the shielding principle should, however, be qualified by reference to the need for an aeronautical study in all cases. Any

object within a radius of 150 meters and below any of the indicated planes, could be considered shielded by the dominant object. More specific principles are indicated in part 2

- 1.9 The shielding effect of immovable obstacles laterally in approach and take-off climb areas is different. In certain circumstances, it may be advantageous to preserve existing unobstructed cross-section areas, particularly when the obstacle is close to the runway. This would guard against future changes in either approach or take-off climb area specifications or the adoption of a turned take-off procedure.

2. Shielding Principles

- 2.1 In assessing whether an existing obstacle shields an obstacle, BDCA will be guided by the principles of shielding detailed below.

2.2 **Obstacles penetrating the approach and take-off climb surfaces**

- (a) An existing obstacle within the approach and take-off climb area is called the critical obstacle. Where a number of obstacles exist closely together, the critical obstacle is the one which subtends the greatest vertical angle measured from the appropriate inner edge.
- (b) As illustrated in figure 4-1, a new obstacle may be assessed as not imposing additional restrictions if:
- (i) when located between the inner edge end and the critical obstacle, the new obstacle is below a plane sloping downwards at 10% from the top of the critical obstacle toward the inner edge;
 - (ii) when located beyond the critical obstacle from the inner edge end, the new obstacle is not higher than the height of the permanent obstacle;
 - (iii) where there is more than one critical obstacle within the approach and take-off climb area, and the new obstacle is located between two critical obstacles, the height of the new obstacle is not above a plane sloping downwards at 10% from the top of the next critical obstacle.

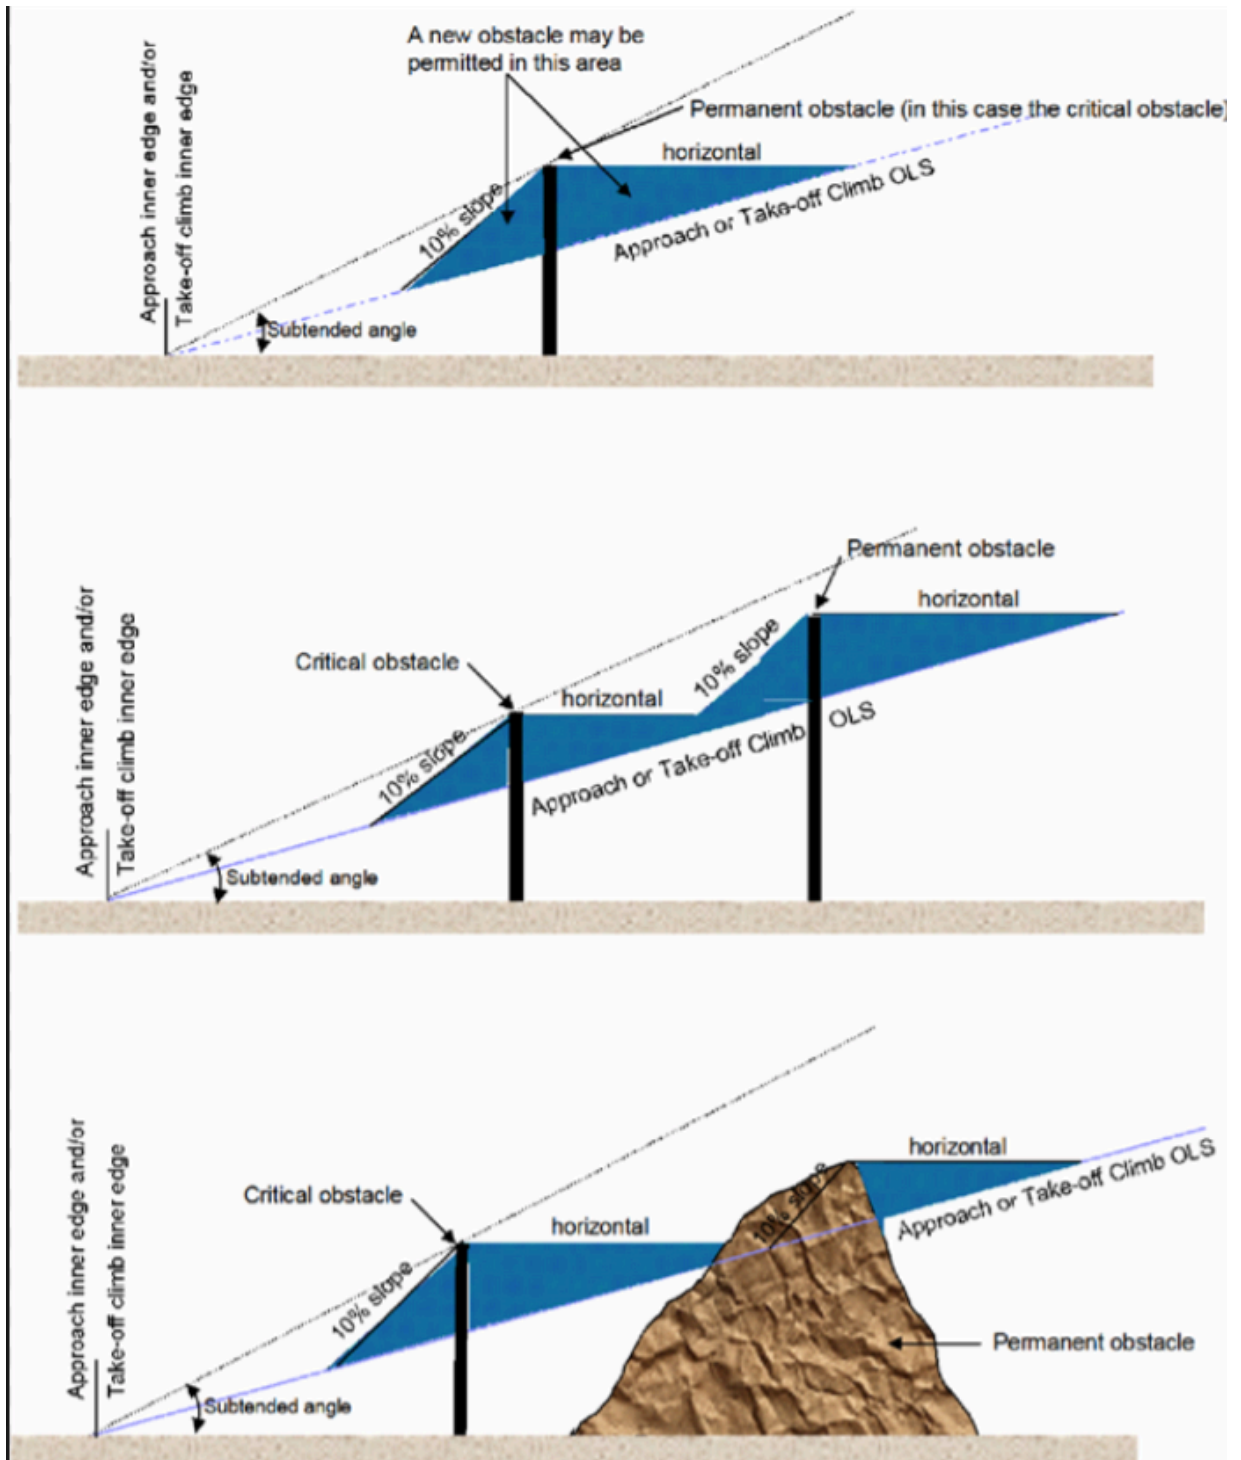


Figure 4-1: Shielding of obstacles penetrating the approach and take-off climb surface

2.3 **Obstacles penetrating the inner and outer horizontal and conical surfaces.** The new obstacle may be accepted if it is in the vicinity of an existing obstacle and does not penetrate a 10% downward sloping conical shaped surface from the top of the existing obstacle, i.e. the new obstacle is shielded radially by the existing obstacle.

2.4 **Obstacles Penetrating the Transitional Surfaces.** A new obstacle may be

assessed as not imposing additional restrictions if it does not exceed the height of an existing obstacle which is closer to the runway strip and the new obstacle is located perpendicularly behind the existing obstacle relative to the runway centreline.


2.5 **Limitations.** The shielding principle which is used to permit the erection of new permanent obstacles should not be considered when:

- (a) is within runway strips
- (b) On precision approach runways, the permanent objects are destined to be erected within the inner 3,000 m from the threshold, above an approach surface, take-off climb surface or baulked landing surface.
- (c) the object penalises the instrument approach areas although they do not exceed the limits defined by the obstacle limitation surfaces;
- (d) Though the conditions in (c) are satisfied, the available free spaces or areas immediately adjacent to the runway extremities are regarded as extensions or the runway length available or, where applicable, as future stopways;
- (e) parallel runways are planned and areas common to instrument approach procedures have to be unified;
- (f) there is a request of installation a high-voltage power lines, fuel storage facilities, etc.
- (g) in the case of a frangible object, its height has been designed so as to ensure vertical clearance by aircraft;
- (h) in case of planned instrument approaches, the type of implementation and probable operating procedure have not been defined.
- (i) a shielded obstacle cannot be used to shield another obstacle as critical obstacle.
- (j) Is located within the transition surface and do not comply with 2.4.

2.6 **Competent Authority.** The applicability of the shielding criterion is solely the authority of the BDCA and can only be applied with its approval and:

- (a) Any object granted with the principle of shielding must be subject to compliance with the criteria of marking and lighting as the case, determined by the BDCA
- (b) The application for the shielding criterion must be accompanied by calculations, coordinates, location charts, drawings of the object to be installed and generals of the shielding object (coordinates height, dimensions, elevation of the terrain, use).

Appendix 1- Figures

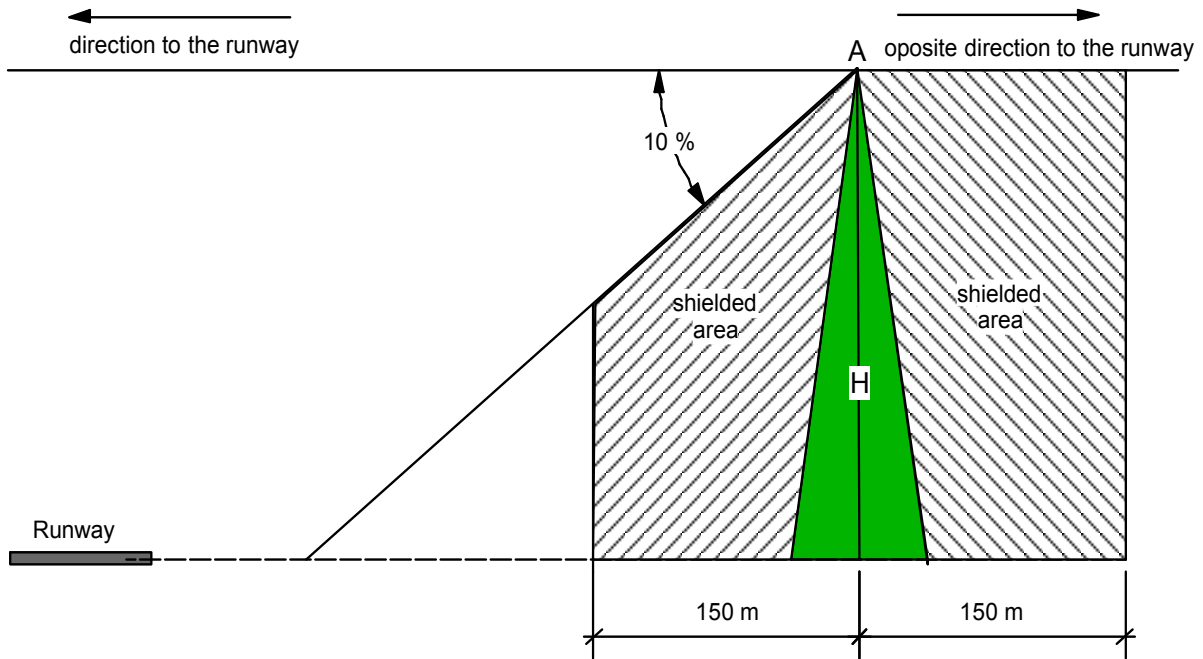

A is the maximum height of the H dominant obstacle

Fig. 4-2 Cross section of shielding principle

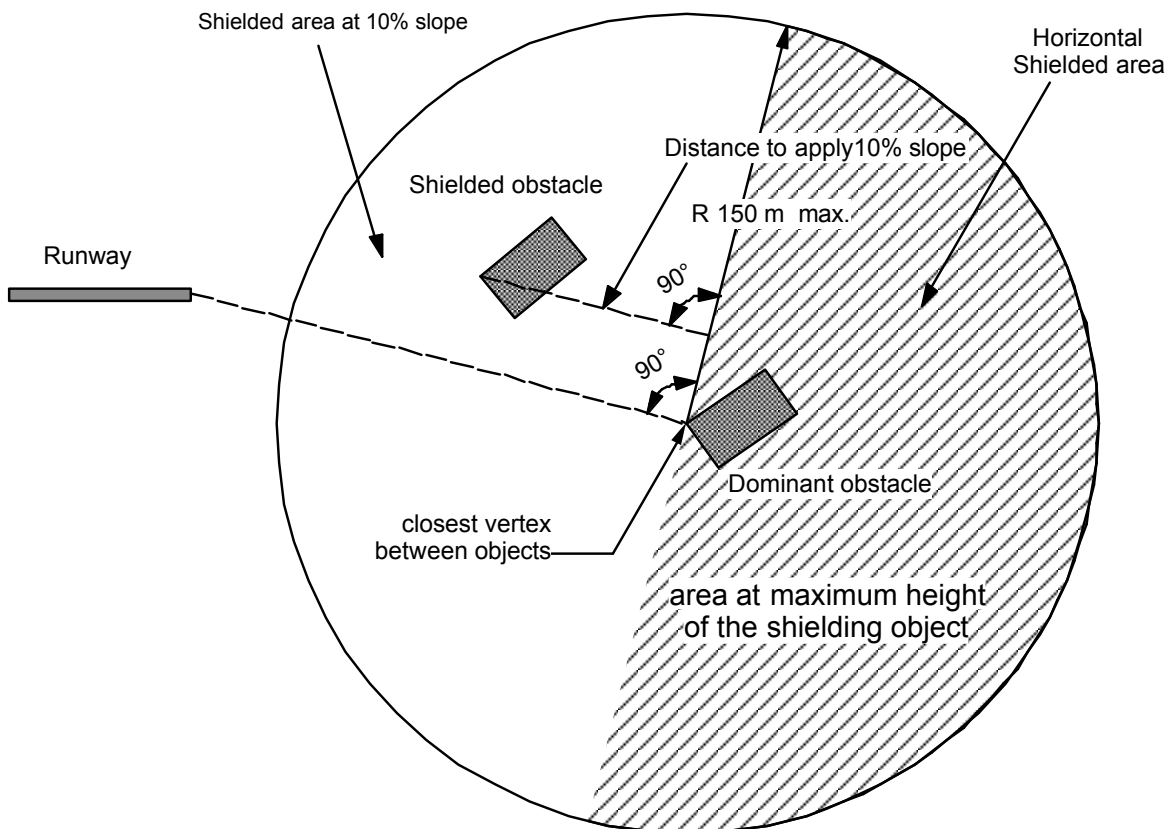


Fig. 4-3 Shielding Area and graphic description of shielding principle